



Manufacturers of High
Performance Floor
Coatings and
Re-Surfacing Screeds


WATERPROOFING

Epoxy Products Limited
7 Haviland Road
Ferndown Industrial Estate
Wimborne
Dorset
BH21 7RZ

Phone: 01202 891899
Fax: 01202 896983
Email: sales@epoxyproducts.co.uk
Web: www.epoxyproducts.co.uk

Bund Paint

- ▲ **Flexible Chemical and Waterproof Paint**
- ▲ **Virtually Odourless—No Pitch, Tar or Solvents**
- ▲ **Internal and External Use**
- ▲ **Easy to Mix Twin Pack - 50/50 Mixing Ratio**

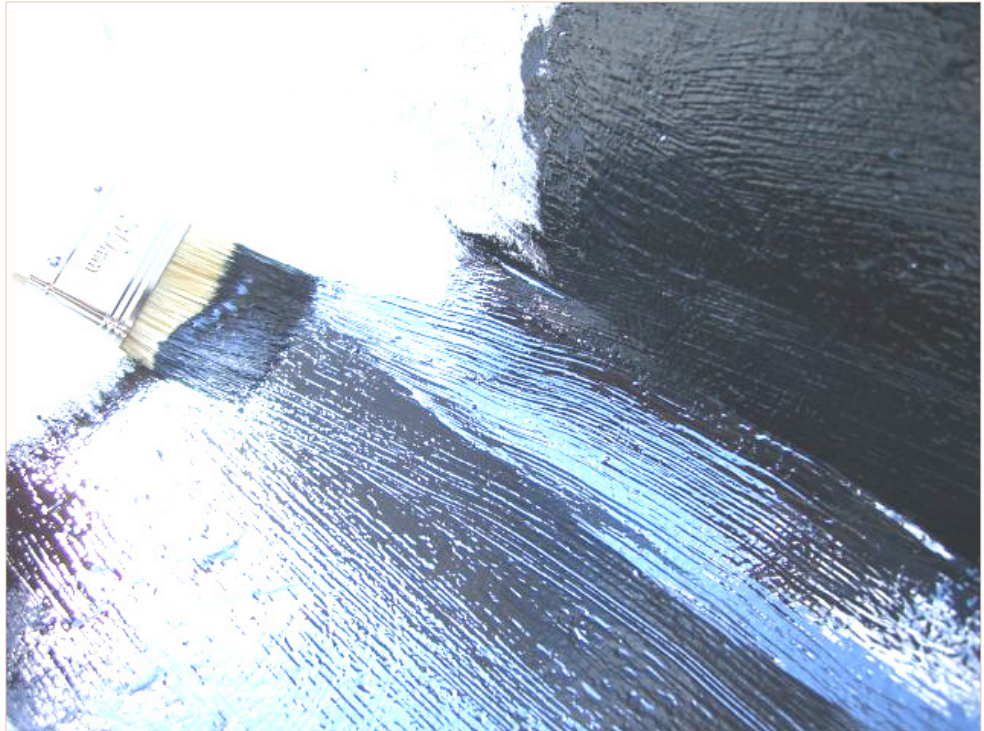

THE RANGE

We have been manufacturing high performance floor coatings for almost three decades. All our epoxy resin floor coatings have been designed and developed with advice from applicators and clients to provide a lasting solution. Simple to mix and easy to apply.

BUND PAINT

Is a tough, flexible, chemical resistant and waterproof epoxy resin coating for concrete and metal bund tanks . Suitable for internal and external surfaces. Chemical storage bund areas, balconies, flat roofs, metal stairways, gutters and all other areas requiring waterproofing and high chemical spillage resistance.

Available in 1, 2 and 4.50 Litre packs

<http://www.epoxyproducts.co.uk/waterproofing.html>



Manufacturers of High
Performance Floor
Coatings and
Re-Surfacing Screeds

WATERPROOFING

Epoxy Products Limited
7 Haviland Road
Ferndown Industrial Estate
Wimborne
Dorset
BH21 7RZ

Phone: 01202 891899
Fax: 01202 896983
Email: sales@epoxyproducts.co.uk
Web: www.epoxyproducts.co.uk

Bund Paint

DESCRIPTION

BUND PAINT is a twin pack epoxy resin coating. When fully cured, the material provides a flexible, abrasion, chemical resistant and waterproof coating of outstanding durability for both interior and exterior applications.

USES: For bund areas to retain spillages from oil, petrol, diesel and a wide range of chemicals. For the complete waterproofing of gutters and as a protective coating for steel.

PREPARATION: Surfaces must be clean, sound and free from surface contamination. Surfaces can be damp, although for more permanent installations we recommend that the surface is as dry as possible. Large cracks must be repaired prior to applying BUND PAINT. Excellent repairs can be carried out using PATCHING MORTAR. Joints or cracks can be bridged by BUND PAINT using a 75mm wide Fibreglass Reinforcing Tape. BUND PAINT can be applied onto painted surfaces but all loose paint must be removed. Remove all loose metal rust by wire brushing. Severe heavily corroded metal should be treated with a suitable rust converter prior to painting with BUND PAINT.

MIXING Empty the entire contents of Pack B (Hardener) into Pack A (Resin) and stir thoroughly using an electric drill and mixing paddle on a slow speed. Once mixed use all within 45 minutes at 20°C. The higher the ambient room temperature the shorter the useable life.

APPLICATION Apply by brush, working well into the substrate. Apply evenly and as generously as required to provide a continuous film of resin. One coat is normally adequate to produce a watertight seal but a second coat maybe necessary particularly on porous or open block work or heavily textured or porous substrates.

FIBREGLASS REINFORCING TAPE

Prepare the surface as required. Mix and apply the BUND PAINT 100mm either side of the joints and cracks. While the surface remains wet and tacky, place the Fibreglass Reinforcing Tape onto the BUND PAINT and press to ensure the tape is well embedded. Tape can be pushed onto wet BUND PAINT and placed along right angles and corners of the structure. Alternatively, all joints, cracks, corners and angles can be treated first with the Fibreglass Reinforcing Tape and BUND PAINT and allowed to harden. A full top coat of BUND PAINT can then be applied over the entire area as one continuous coating.

HEALTH AND SAFETY

Read the Health and Safety Data Sheet prior to handling this product.

PRODUCT DATA

APPEARANCE

Thick viscous liquid available in black only

COVERAGE

Approximately 3m² per litre depending upon the site conditions that prevail, i.e., surface texture, porosity and temperature of the substrate.

POT LIFE

When fully mixed 35 minutes @ 20°C. Extended pot life at lower temperatures, reduced pot life at high temperatures.

SHELF LIFE

24 Months in sealed containers if stored under normal conditions

HARDENING/CURE TIME

Tack free in 24 hours @ 20°C. 48 hours @ 15°C.

Full cure in 7 days. Do not use at temperatures below 5°C.

Slower curing resulting in longer hardening periods for cold conditions.

CHEMICAL RESISTANCE

Resistant to a wide range of acids, alkalis, solvents and chemicals found within industry.

TOOL CLEANING

Clean all tools with EPOXY PRODUCTS CLEANING SOLVENT.

AVAILABILITY

Twin pack product. Combined volume of Resin and Hardener making 1, 2 or 4.50 Litres

Whilst Epoxy Products Limited endeavours to ensure that any advice, recommendation, specification or information it may give is accurate and correct, it can not, because it has no direct or continuous control over where or how its products are applied, accept any liability either directly or indirectly arising from the use of its products, whether or not in accordance with any advice, specification or information given.